

BLAZE

Technical Specifications | Teknik Özellikler

Body	: Polycarbonate
Diffuser	: Polycarbonate
Light Source	: Mid Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50-60Hz
Body Color	: Grey
Usage	: Surface Mounted
IP	: IP65

Gövde	: Polikarbon
Difüzör	: Polikarbon
Işık Kaynağı	: Mid Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50-60Hz
Görev Rengi	: Gri
Kullanım Şekli	: Sıva Üstü
IP	: IP65

Product Chart | Ürün Tablosu


Product Code	Power	CCT/K	Lumen
SML330.060.U43.00.15.30	15W	3000	1.710
SML330.060.U43.00.15.40	15W	4000	1.785
SML330.060.U43.00.15.65	15W	6500	1.785
SML330.120.U43.00.36.30	36W	3000	3.780
SML330.120.U43.00.36.40	36W	4000	3.960
SML330.120.U43.00.36.65	36W	6500	3.960
SML330.150.U43.00.50.30	50W	3000	5.250
SML330.150.U43.00.50.40	50W	4000	5.500
SML330.150.U43.00.50.65	50W	6500	5.500

Options | Opsiyonlar

DALI Compatible
Emergency Unit : (1-3 Hour)

DALI Uyumlu
Acil Durum Kiti : (1-3 Saat)

Dimensions | Ölçüler

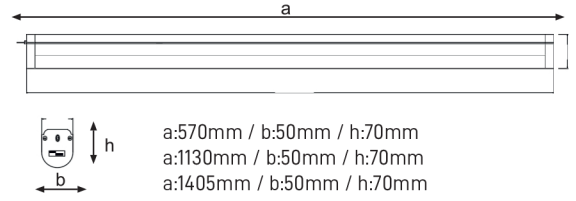

Photometric Data | Fotometrik Veri

