

DRACO-S

Technical Specifications | Teknik Özellikler

Body	: DKP Sheet Metal
Reflector	: DKP Sheet Metal
Glass	: Tempered
Light Source	: Mid Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 9006
Usage	: Surface Mounted
IP	: IP65


Gövde	: DKP Sac
Reflektör	: DKP Sac
Cam	: Temperli
Işık Kaynağı	: Mid Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50-60Hz
Gövde Rengi	: Ral 9006
Kullanım Şekli	: Sıva Üstü
IP	: IP65

Options | Opsiyonlar

DALI Compatible
Emergency Unit (1-3 Hour)

DALI Uyumlu
Acil Durum Kit'i (1-3 Saat)

Dimensions | Ölçüler

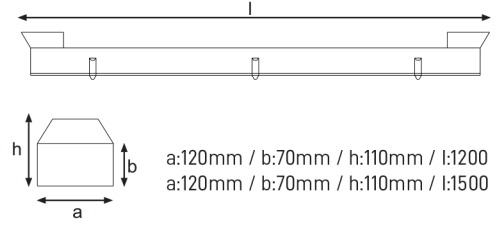

Product Chart | Ürün Tablosu

Product Code	Power	CCT/K	Lumen
SML101.120.Y43.00.40.40	40W	4000	5280
SML101.120.Y43.00.50.40	50W	4000	6600
SML101.150.Y43.00.50.40	65W	4000	8580
SML101.120.Y43.00.40.65	40W	6500	5280
SML101.120.Y43.00.50.65	50W	6500	6600
SML101.150.Y43.00.50.65	65W	6500	8580

Photometric Data | Fotometrik Veri

