

## DRACO-L

### Technical Specifications | Teknik Özellikler

Body	: DKP Sheet Metal
Reflector	: DKP Sheet Metal
Glass	: Tempered
Light Source	: Mid Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 9006
Usage	: Surface Mounted
IP	: IP65


Gövde	: DKP Sac
Reflektör	: DKP Sac
Cam	: Temperli
Işık Kaynağı	: Mid Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50-60Hz
Gövde Rengi	: Ral 9006
Kullanım Şekli	: Sıva Üstü
IP	: IP65

### Options | Opsiyonlar

DALI Compatible  
Emergency Unit (1-3 Hour)

DALI Uyumlu  
Acil Durum Kit'i (1-3 Saat)

### Dimensions | Ölçüler

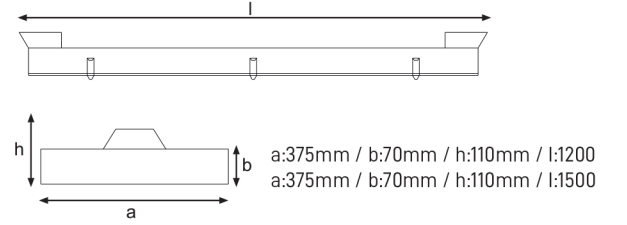

### Product Chart | Ürün Tablosu

Product Code	Power	CCT/K	Lumen
SML104.120.Y43.00.150.40	150W	4000	20100
SML104.120.Y43.00.175.40	175W	4000	23800
SML104.120.Y43.00.195.40	195W	4000	26325
SML104.150.Y43.00.245.40	245W	4000	33075
SML104.120.Y43.00.150.65	150W	6500	20100
SML104.120.Y43.00.175.65	175W	6500	23800
SML104.120.Y43.00.195.65	195W	6500	26325
SML104.150.Y43.00.245.65	245W	6500	33075

### Photometric Data | Fotometrik Veri

