



CABERNA-S

Technical Specifications | Teknik Özellikler

Body	: Electrostatic Powder Coated DKP Sheet Metal
Diffuser	: Opal Diffuser
Light Source	: Mid Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 9016
Usage	: Recessed Ceiling
IP	: IP20 / IP40

Gövde	: Elektrostatik Toz Boyalı DKP Sac
Difüzör	: Opal Difüzör
Işık Kaynağı	: Mid Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50-60Hz
Gövde Rengi	: Ral 9016
Kullanım Şekli	: Sıva Altı
IP	: IP20 / IP40


Product Chart | Ürün Tablosu

Product Code	Power	CCT/K	Lumen	Cut Out (mm)
SML211.306.10.00.21.30	21W	3000	2100	275X575
SML211.306.11.00.21.30	21W	3000	2100	300X600
SML211.306.12.00.21.30	21W	3000	2100	275X575
SML211.306.10.00.21.40	21W	4000	2310	275X575
SML211.306.11.00.21.40	21W	4000	2310	300X600
SML211.306.12.00.21.40	21W	4000	2310	275X575
SML211.306.10.00.21.65	21W	6500	2310	275X575
SML211.306.11.00.21.65	21W	6500	2310	300X600
SML211.306.12.00.21.65	21W	6500	2310	275X575

Options | Opsiyonlar

- DALI Compatible
- Emergency Unit (1-3 Hour)
- Suspended Ceiling Compatible : Plasterboard, Rockwool, Clip-in
- DALI Uyumlu
- Acil Durum Kit'i (1-3 Saat)
- Asma Tavan Uyumlu : Alçıpan, Taşyünü, Clip-in

Dimensions | Ölçüler

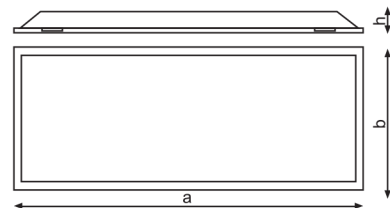

a:295mm / b:595mm / h:60mm

Photometric Data | Fotometrik Veri

