

CABERNA-L-XL

Technical Specifications | Teknik Özellikler


Body	: Electrostatic Powder Coated DKP Sheet Metal
Diffuser	: Opal Diffuser
Light Source	: Mid Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 9016
Usage	: Recessed Ceiling
IP	: IP20 / IP40
Gövde	: Elektrostatik Toz Boyalı DKP Sac
Difüzör	: Opal Difüzör
Işık Kaynağı	: Mid Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50-60Hz
Gövde Rengi	: Ral 9016
Kullanım Şekli	: Sıva Altı
IP	: IP20 / IP40

Options | Opsiyonlar

DALI Compatible
Emergency Unit (1-3 Hour)
Suspended Ceiling Compatible : Plasterboard,
Rockwool, Clip-in

DALI Uyumlu
Acil Durum Kit'i (1-3 Saat)
Asma Tavan Uyumlu : Alçıpan, Taşyünü, Clip-in


Photometric Data | Fotometrik Veri

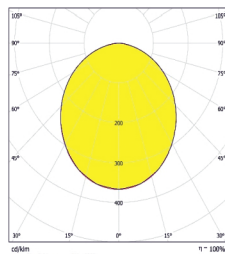

Product Chart | Ürün Tablosu

Product Code	Power	CCT/K	Lumen	Cut Out (mm)
SML211.312.10.00.36.30	36W	3000	3600	275X1175
SML211.312.11.00.36.30	36W	3000	3600	300X1200
SML211.312.12.00.36.30	36W	3000	3600	275X1175
SML211.312.10.00.36.40	36W	4000	3816	275X1175
SML211.312.11.00.36.40	36W	4000	3816	300X1200
SML211.312.12.00.36.40	36W	4000	3816	275X1175
SML211.312.10.00.36.65	36W	6500	3816	275X1175
SML211.312.11.00.36.65	36W	6500	3816	300X1200
SML211.312.12.00.36.65	36W	6500	3816	275X1175
SML211.612.10.00.75.30	75W	3000	7500	575X1175
SML211.612.11.00.75.30	75W	3000	7500	600X1200
SML211.612.12.00.75.30	75W	3000	7500	575X1175
SML211.612.10.00.75.40	75W	4000	7950	575X1175
SML211.612.11.00.75.40	75W	4000	7950	600X1200
SML211.612.12.00.75.40	75W	4000	7950	575X1175
SML211.612.10.00.75.65	75W	6500	7950	575X1175
SML211.612.11.00.75.65	75W	6500	7950	600X1200
SML211.612.12.00.75.65	75W	6500	7950	575X1175

Dimensions | Ölçüler

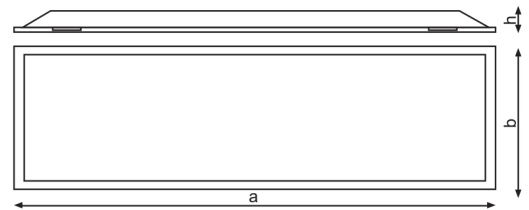

a:295mm / b:1195mm / h:60mm