

GLISSEO


Technical Specifications | Teknik Özellikler

Body	: Aluminium
Diffuser	: Opal Diffuser
Light Source	: Mid Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 9005 / Optional
Usage	: Surface Mounted / Pendant
IP	: IP20 / IP40

Gövde	: Alüminyum
Lens	: Opal Difüzör
Isık Kaynađı	: Mid Power LED
CRI	: Ra>80
Giris Gerilimi	: 220-240V AC 50/60Hz
Gövde Rengi	: Ral 9005 / Opsiyonel
Kullanım Şekli	: Sıva Üstü / Sarkıt
IP	: IP20 / IP40

Product Chart | Ürün Tablosu

Product Code	Power	CCT/K	Lumen
SML620.300.V13.00.60.30	60W	3000	5520
SML620.300.V13.00.60.40	60W	4000	6180
SML620.300.V13.00.60.65	60W	6500	6180

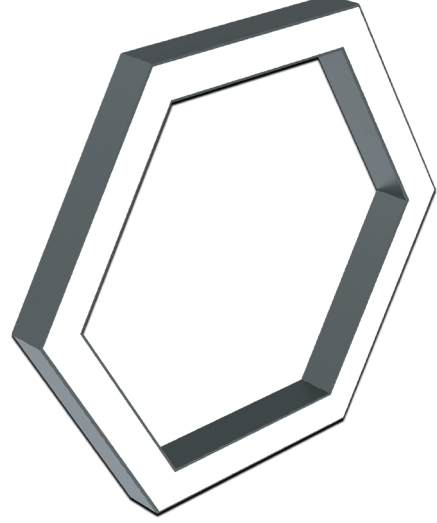

Options | Opsiyonlar

DALI Compatible
Emergency Unit (1-3 Hour)

DALI Uyumlu
Acil Durum Kit'i (1-3 Saat)

**It Can Be Produced in Desired Sizes and
in Different Combinations.**

İstenilen Ölçülerde ve Farklı Kombinasyonlarda
Üretilir.

Dimensions | Ölçüler

