

INTERNA-3&4

Technical Specifications | Teknik Özellikler

Body	: Aluminium
Diffuser	: Opal Diffuser
Light Source	: Mid Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 7002
Frame Color	: Ral 9003
Usage	: Recessed Ceiling
IP	: IP20 / IP40

Gövde	: Alüminyum
Difüzör	: Opal Difüzör
Işık Kaynağı	: Mid Power LED
CRI	: Ra>80
Giris Gerilimi	: 220-240V AC 50/60Hz
Gövde Rengi	: Ral 7002
Çerçeve Rengi	: Ral 9003
Kullanma Şekli	: Sıva Altı
IP	: IP20 / IP40

Product Chart | Ürün Tablosu


Product Code	Power	CCT	Lumen	Cut Out (mm)
SML351.103.D10.00.06.30	6W	3000	618	Ø88
SML351.103.D10.00.06.40	6W	4000	654	Ø88
SML351.103.D10.00.06.65	6W	6500	654	Ø88
SML351.104.D10.00.12.30	12W	3000	1236	Ø118
SML351.104.D10.00.12.40	12W	4000	1308	Ø118
SML351.104.D10.00.12.65	12W	6500	1308	Ø118

Options | Opsiyonlar

Sensor Compatible
DALI Compatible
Emergency Unit : (1-3 Hour)

Sensör Uyumlu
DALI Uyumlu
Acil Durum Kiti : (1-3 Saat)

Dimensions | Ölçüler

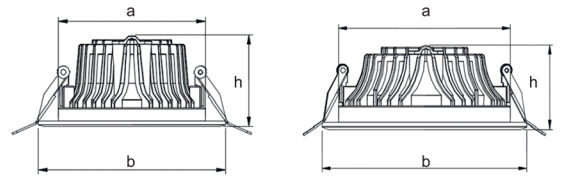

a:0,88mm / b:0115mm / h:39mm a:0,118mm / b:0,145mm / h:43mm

Photometric Data | Fotometrik Veri

