



SERPEN

Technical Specifications | Teknik Özellikler

Body	: Electrostatic Powder Coated DKP Sheet Metal
Diffuser	: Tempered Glass
Light Source	: TL5 Fluorescent Lamp
Ballast	: Electronic Ballast
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 9016
Usage	: Surface Mounted
IP	: IP65


Gövde	: Elektrostatik Toz Boyalı DKP Sac
Difüzör	: Temperli Cam
Işık Kaynağı	: TL5 Floresan Lamba
Balast	: Elektronik Balast
Giriş Gerilimi	: 220-240V AC 50-60Hz
Gövde Rengi	: Ral 9016
Kullanım Şekli	: Sıva Üstü
IP	: IP65

Options | Opsiyonlar

DALI Compatible
Emergency Unit (1-3 Hour)

DALI Uyumlu
Acil Durum Kit'i (1-3 Saat)

Dimensions | Ölçüler

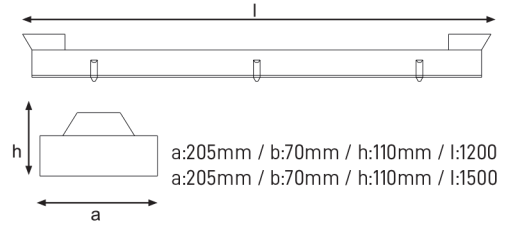

Product Chart | Ürün Tablosu

Product Code	Power	Lamp	a / b / c (mm)
SMF 101.154 YT	1x54W	TL5 FLUORESCENT	1200X120X70
SMF 101.254 YT	2x54W	TL5 FLUORESCENT	1200X205X70
SMF 101.454 YT	4x54W	TL5 FLUORESCENT	1200X375X70
SMF 101.180 YT	1x80W	TL5 FLUORESCENT	1200X120X70
SMF 101.280 YT	2x80W	TL5 FLUORESCENT	1200X205X70
SMF 101.480 YT	4x80W	TL5 FLUORESCENT	1200X375X70