



SYRAH

Technical Specifications | Teknik Özellikler

| | |
|---------------|---|
| Body | : Electrostatic Powder Coated DKP Sheet Metal |
| Light Source | : Mid Power LED |
| CRI | : Ra>80 |
| Input Voltage | : 220-240V AC 50/60Hz |
| Body Color | : Ral 9016 |
| Usage | : Recessed Ceiling |
| IP | : IP20 / IP40 |

| | |
|----------------|------------------------------------|
| Gövde | : Elektrostatik Toz Boyalı DKP Sac |
| Işık Kaynağı | : Mid Power LED |
| CRI | : Ra>80 |
| Giriş Gerilimi | : 220-240V AC 50-60Hz |
| Gövde Rengi | : Ral 9016 |
| Kullanım Şekli | : Sıva Altı |
| IP | : IP20 / IP40 |


Product Chart | Ürün Tablosu

| Product Code | Power | CCT/K | Lumen | Cut Out (mm) |
|-------------------------|-------|-------|-------|--------------|
| SML211.606.100.00.40.30 | 40W | 3000 | 3200 | 575x575 |
| SML211.606.101.00.40.30 | 40W | 3000 | 3200 | 600X600 |
| SML211.606.102.00.40.30 | 40W | 3000 | 3200 | 575x575 |
| SML211.606.100.00.40.40 | 40W | 4000 | 3600 | 575x575 |
| SML211.606.101.00.40.40 | 40W | 4000 | 3600 | 600X600 |
| SML211.606.102.00.40.40 | 40W | 4000 | 3600 | 575x575 |
| SML211.606.100.00.40.65 | 40W | 6500 | 3600 | 575x575 |
| SML211.606.101.00.40.65 | 40W | 6500 | 3600 | 600X600 |
| SML211.606.102.00.40.65 | 40W | 6500 | 3600 | 575x575 |

Options | Opsiyonlar

- DALI Compatible
- Emergency Unit (1-3 Hour)
- Suspended Ceiling Compatible : Plasterboard, Rockwool, Clip-in)
- DALI Uyumlu
- Acil Durum Kit'i (1-3 Saat)
- Asma Tavan Uyumlu : Alçıpan, Taşyünü, Clip-in)

Dimensions | Ölçüler

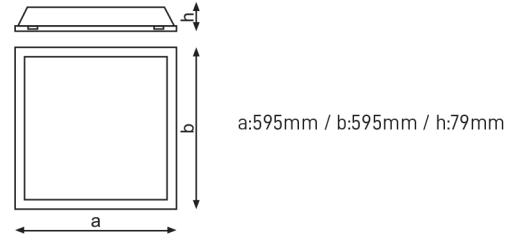

Photometric Data | Fotometrik Veri

